




C : +91 9172036887
M: info@jimreeves.in

FIXED DSPA FIRE SUPPRESSION SYSTEM


PROJECT :	HAZARDS ROOM/SHELTER PROTECTION		
CUSTOMER :			
PO NO. / DT. :	/		
PRODUCT NAME :	MANUAL ISOLATION SWITCH Ex.d		
PART NO. :	F/D/B2/1/00/T3		
PRODUCT CODE :	MAS/T3		
DOCUMENT NAME :	MIS – DATA SHEET		
DOC NO.:	CAGS/8A.C.1	REV.NO. :	0
DOC DT.:	12/10/2023	REV.DT. :	0



KNOVAL
TECHNOLOGIES

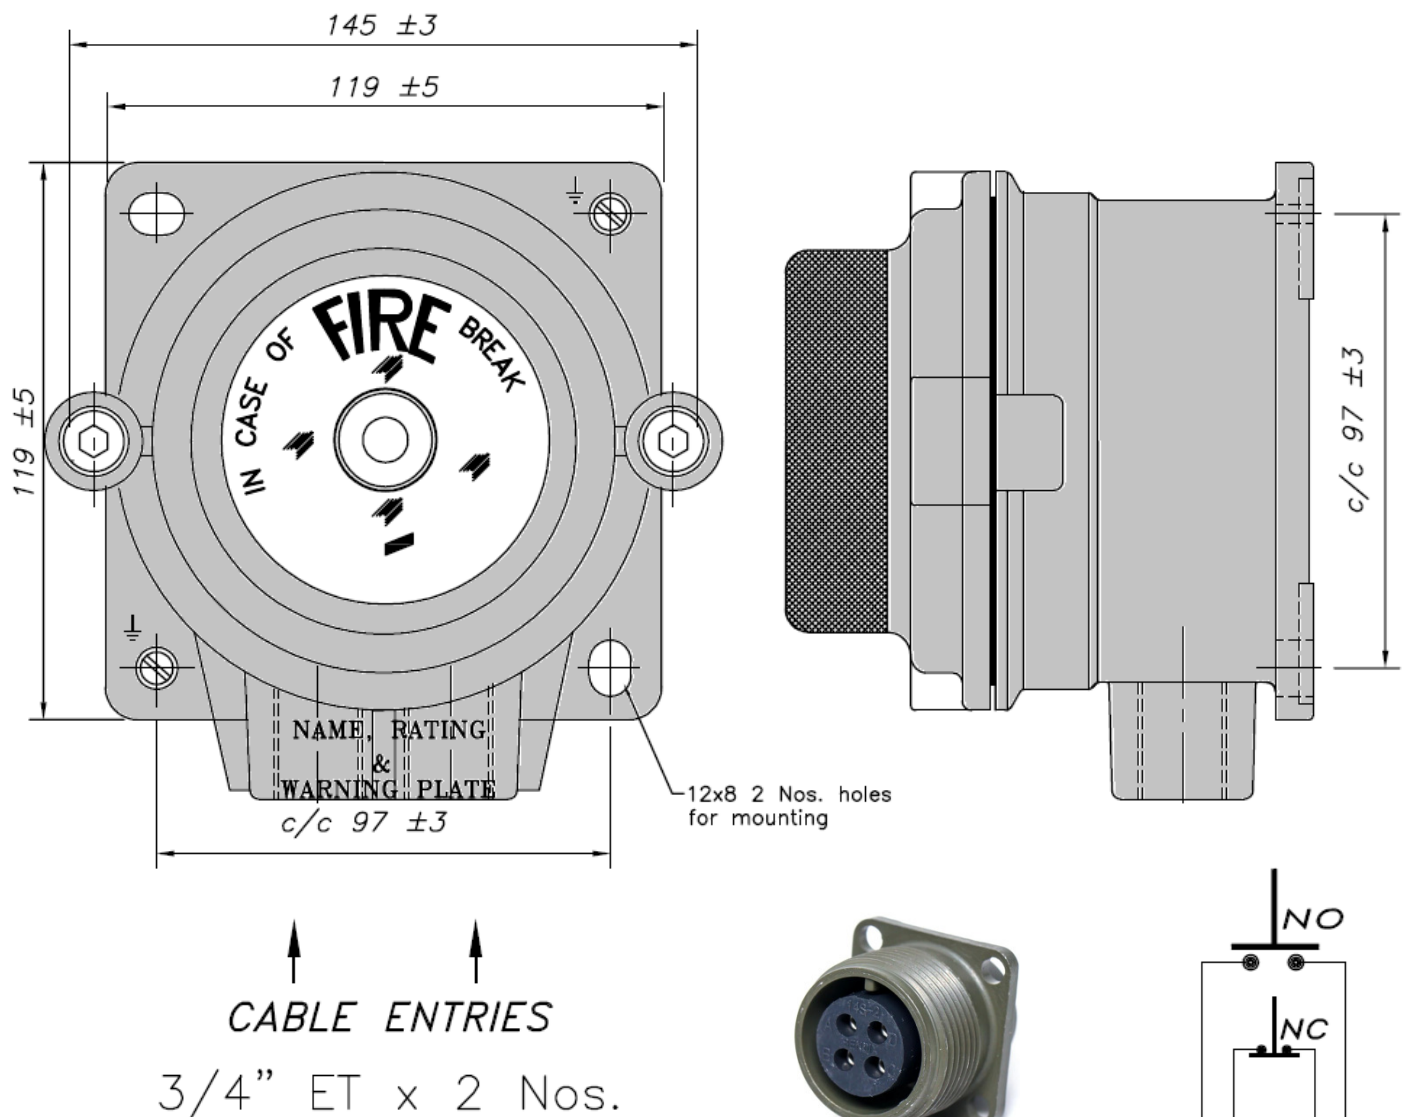

Note: Circular MIL Spec Connector,
4position Male & Female to be
provided by customer.

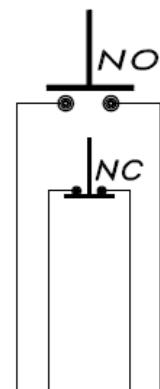

TECHNICAL DATA

Enclosure:	Ex-d As Per IS:2148
Protection:	IP-66 As per IS IEC 60529(2001) (Reaffirmed 2014)
MOC:	Die Cast AL. Alloy LM-6
Rating:	10A, 415V AC, 50 Hz
Switch:	A) Contact Element (1 NO) 1nos B) Terminals 32A 415. AC 1nos
Gasket:	Endless, Moulded Neoprene
Cable Entry:	3/4" ET x 2nos
Earthing:	1no Inside & 2nos Outside
Hardware:	HTS Electroplated
Finish:	GREY Epoxy
Brand :	Knoval - Alpha

